
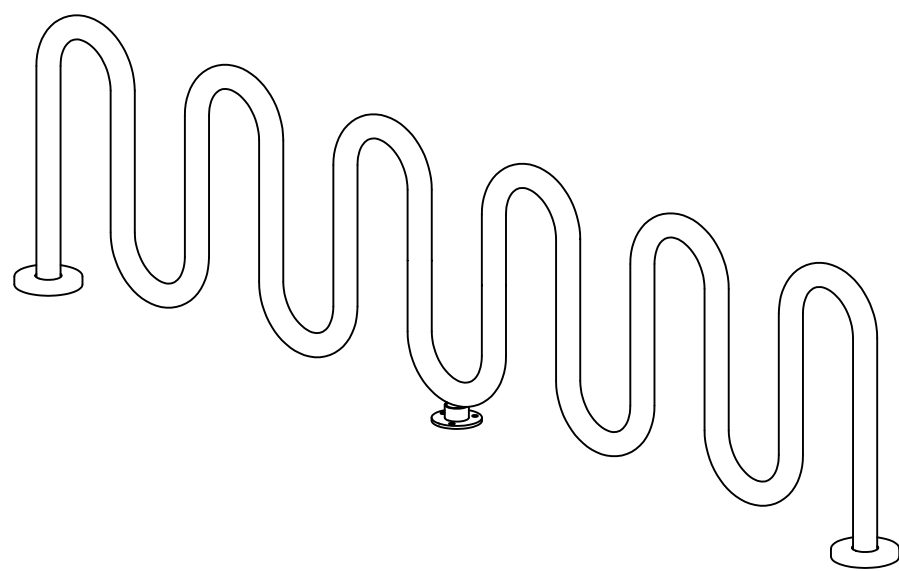


* S-2 SURFACE MOUNT *
(SEE NOTES)

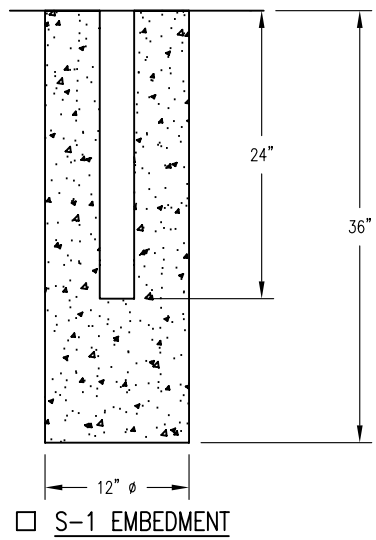




FINISH OPTIONS

- HOT DIPPED GALVANIZED (VISIBLE VENT HOLES)
- COATED W/ ZINC RICH EPOXY THEN FINISHED W/ POLYESTER POWDER COATING.


NOTES:

- 1.) 1/2" X 3 3/4" EXPANSION ANCHOR BOLTS PROVIDED FOR OPTION S-2.
 - 2.) PLUGS PROVIDED FOR VISIBLE VENT HOLES. (HOT DIPPED GALV. ONLY)
- * UPCHARGE APPLIES TO SUPPORT OPTION - CONSULT YOUR LOCAL REPRESENTATIVE.

 DuMor, inc. P.O. Box 142 Mifflintown, PA 17059-0142	SCALE :	NONE	TITLE :		BIKE RACK	
	DATE DRAWN :	4/19/00	REV.	DRAWING NUMBER	125-60	SHEET 1 OF 2
	DRAWN BY :	HD	C			
	DATE REV. :	12/20/06				
REV. BY :	ESS					

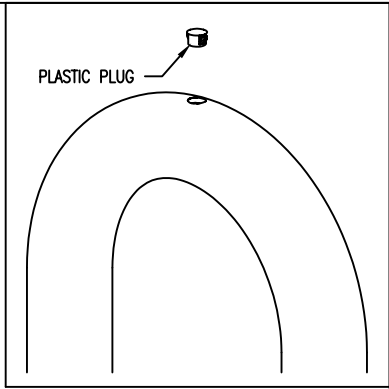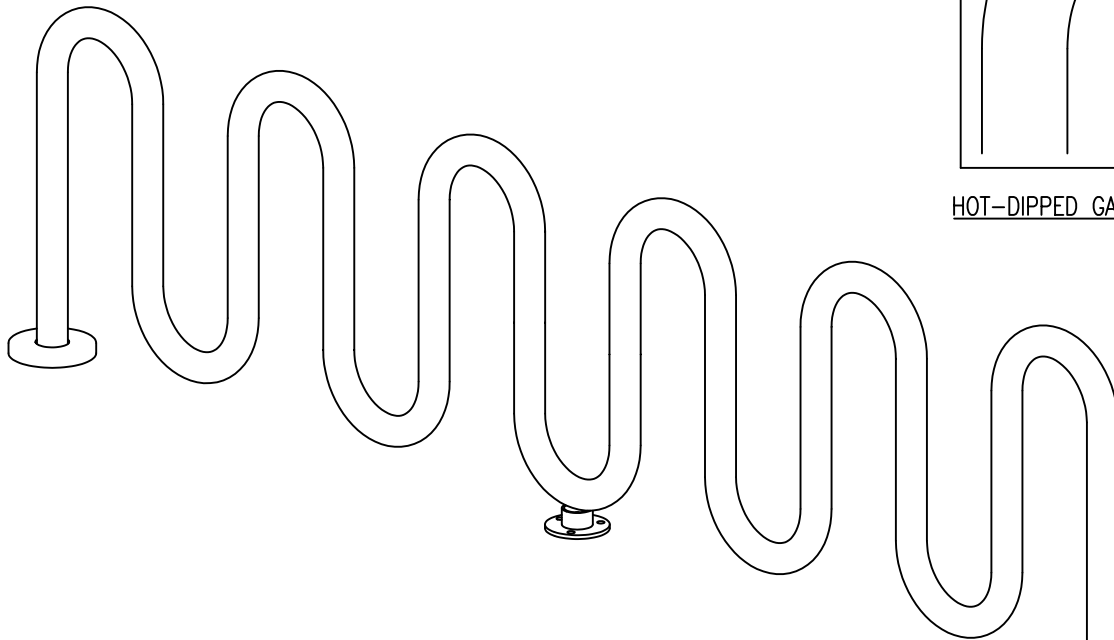

HOT-DIPPED GALV. BIKE RACK ONLY



INSTALLATION FOR SURFACE MOUNT

STEP 1:
 USE 1 - PC. BIKE LOOP, SURFACE MOUNT (2)
 3 - PCS. 3/8" THK SURFACE MOUNT PLATE (3)
 2 - PCS. 10 GA X 8" DIA ANCHOR PLATE COVER (1)
 3 - PCS. 5/8" X 1 1/2" SS FLT SKT HD CAP SCREW (4)
 SLIDE 10 GA X 8" DIA ANCHOR COVER (1) OVER BIKE LOOP,
 SURFACE MOUNT (2) LEGS. ATTACH 3/8" THK. SURFACE
 MOUNT PLATE (3) TO BIKE LOOP, SURFACE MOUNT (3) USING
 HARDWARE (4).

STEP 2:
 ANCHOR ACCORDINGLY.

INSTALLATION FOR SUB FLOOR
 SAME AS SURFACE MOUNT BUT DO NOT USE
 10 GA X 8" DIA ANCHOR PLATE COVER.

INSTALLATION FOR PLASTIC PLUG HOT-DIPPED GALV ONLY
 INSERT PLASTIC PLUG INTO HOLE ON TOP OF EACH LOOP

ITEM	QTY	PART NO	DESCRIPTION
1	2	0-125-04	10 GA X 8" DIA STL COVER W/ 3 1/8" DIA HOLE
2	1	0-125-60/S-2	6-PEAK LOOP BIKE RACK FOR SURF MT
3	3	0-83-00-03	3/8" THK SURFACE MOUNT PLATE
4	3	1-12-102	5/8" X 1 1/2" SS FLT SKT HD CAP SCR

<p>DuMor, inc. P.O. Box 142 Mifflintown, PA 17059-0142</p>	SCALE :	NONE	TITLE : BIKE RACK ASSEMBLY	
	DATE DRAWN :	4/19/00		
	DRAWN BY :	HD	REV. :	DRAWING NUMBER
	DATE REV. :	12/20/06	C	125-60
	REV. BY :	ESS		