



* S-2 SURFACE MOUNT *
(SEE NOTES)

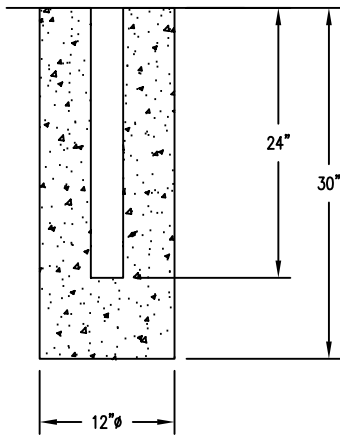

S-1 EMBEDMENT

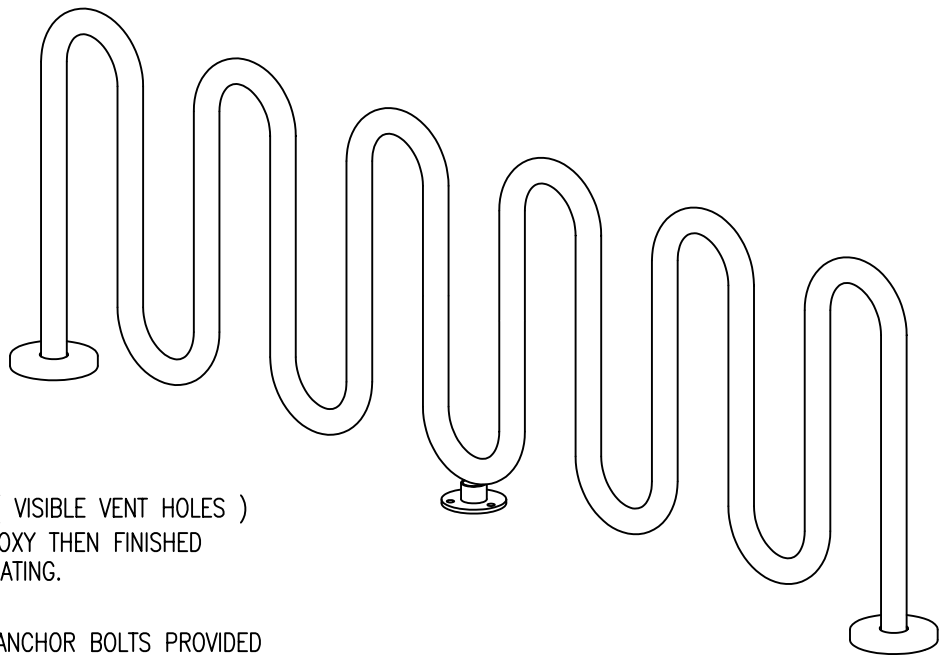




FINISH OPTIONS

- HOT DIPPED GALVANIZED (VISIBLE VENT HOLES)
- COATED W/ ZINC RICH EPOXY THEN FINISHED W/ POLYESTER POWDER COATING.


NOTES:

- 1.) 1/2" X 3 3/4" EXPANSION ANCHOR BOLTS PROVIDED FOR OPTION S-2.
 - 2.) PLUGS PROVIDED FOR VISIBLE VENT HOLES. (HOT DIPPED GALV. ONLY)
- * UPCHARGE APPLIES TO SUPPORT OPTION - CONSULT YOUR LOCAL REPRESENTATIVE.

 DuMor, inc. P.O. Box 142 Mifflintown, PA 17059-0142	SCALE :	NONE	TITLE :		BIKE RACK	
	DATE DRAWN :	5/09/00	REV.	DRAWING NUMBER	130-60	
	DRAWN BY :	AWH	B			
	DATE REV. :	12/19/06				
	REV. BY :	ESS				SHEET 1 OF 2

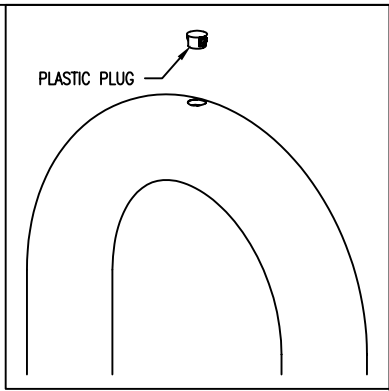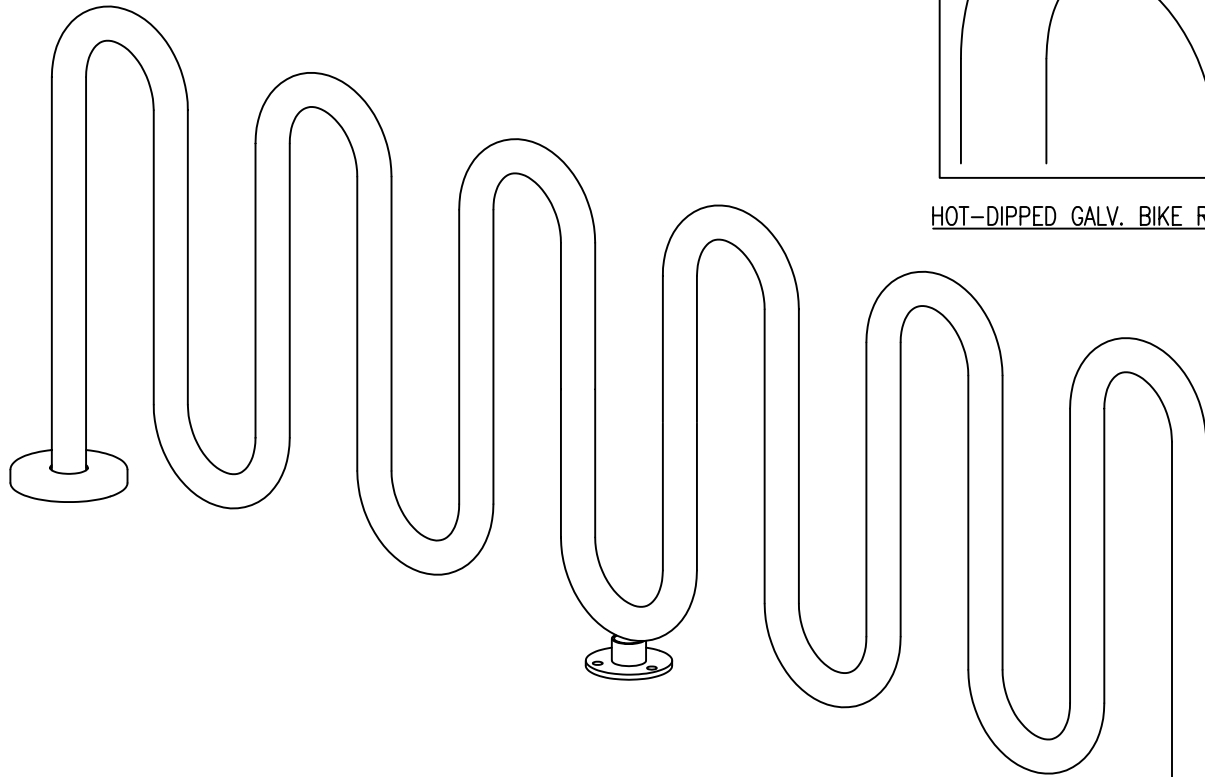

HOT-DIPPED GALV. BIKE RACK ONLY



INSTALLATION FOR SURFACE MOUNT

STEP 1:

- USE 1 - PC. BIKE LOOP, SURFACE MOUNT (2)
 - 3 - PCS. 3/8" THK SURFACE MOUNT PLATE (3)
 - 3 - PCS. 10 GA X 8" DIA ANCHOR PLATE COVER (1)
 - 3 - PCS. 5/8" X 1 1/2" SS FLT SKT HD CAP SCREW (4)
- SLIDE 10 GA X 8" DIA ANCHOR COVER (1) OVER BIKE LOOP, SURFACE MOUNT (2) LEGS. ATTACH 3/8" THK. SURFACE MOUNT PLATE (3) TO BIKE LOOP, SURFACE MOUNT (3) USING HARDWARE (4).

STEP 2:

ANCHOR ACCORDINGLY.

INSTALLATION FOR SUB FLOOR
 SAME AS SURFACE MOUNT BUT DO NOT USE
 10 GA X 8" DIA ANCHOR PLATE COVER.

INSTALLATION FOR PLASTIC PLUG HOT-DIPPED GALV ONLY

INSERT PLASTIC PLUG INTO HOLE ON TOP OF EACH LOOP

ITEM	QTY	PART NO	DESCRIPTION
1	1	0-130-60/S-2	6 PEAK LOOP BIKE RACK FOR SURF MT
2	3	0-83-00-03	3/8" THK SURFACE MOUNT PLATE
3	2	0-83-00-04	10 GA X 8" DIA STL ANCHOR PLATE COVER
4	3	1-12-102	5/8" X 1 1/2" SS FLT SKT HD CAP SCR

DuMor, inc.
 P.O. Box 142 Mifflintown, PA 17059-0142

SCALE : NONE
 DATE DRAWN : 5/09/00
 DRAWN BY : AWH
 DATE REV. : 12/19/06
 REV. BY : ESS

TITLE : BIKE RACK ASSEMBLY

REV. B	DRAWING NUMBER 130-60	SHEET 2 OF 2
--------	-----------------------	--------------