


NOTES:

- 1.) ALL STL. MEMBERS COATED W/ ZINC RICH EPOXY THEN FINISHED W/ POLYESTER POWDER COATING.
- 2.) 1/2" X 3 3/4" EXPANSION ANCHOR BOLTS PROVIDED.
- 3.) BENCH IS SHIPPED UNASSEMBLED.

	SCALE : NONE DATE DRAWN : 8/12/11	TITLE :	BENCH		
DuMor, inc.	DRAWN BY : JSB	REV.	DRAWING		SHEET
•	DATE REV. :	_ ^	NUMBER	425-34/S-5	
P.O. Box 142 Mifflintown, PA 17059-0142	REV. BY:				1 0F 2

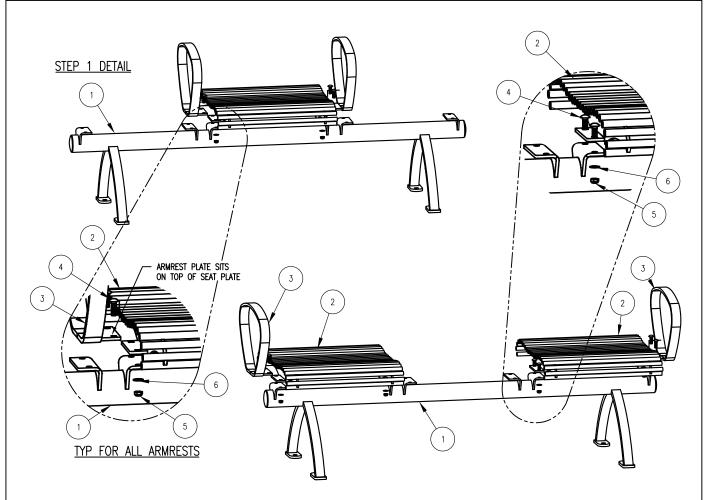

STEP 2 DETAIL

STEP 1:

USE 1 - PC. SEAT SUPPORT FOR 3 SEATS. FREE STD (1)

- 1 PC. STL BKLS SEAT (20") (2)
- 2 PCS. STL ARMREST (3)
- 4 PCS. 3/8" X 1 1/4" SS. CGE BOLT (5)
- 4 PCS. 3/8" SS. THIN NYLON LOCKNUT (6)
- 4 PCS. 3/8" SS. FLAT WASHER (7)

ATTACH STL BKLS SEAT (20") (2), STL ARMREST (3) TO CENTER LOCATION OF SEAT SUPPORT FOR 3 SEATS, FREE STD (4). USING HARDWARE (5, 6 & 7). TIGHTEN TO SNUG FIT.

STEP 2:

USE 1 - PC. STL BKLS SEAT (20") (2)

- 2 PC. STL ARMREST (3)
- 8 PCS. 3/8" X 1 1/4" SS. CGE BOLT (5)
- 8 PCS. 3/8" SS. THIN NYLON LOCKNUT (6)
- 8 PCS. 3/8" SS. FLAT WASHER (7)

ATTACH STL BKLS SEAT (20") (2), STL ARMREST (3) TO STEP 1 ASSEMBLY USING HARDWARE (5, 6 & 7). TIGHTEN TO SNUG FIT.

NOTE:

- 1.) DURING ASSEMBLY PROCEDURE; DO NOT COMPLETELY TIGHTEN HARDWARE.
- 2.) THE ACTUAL PARTS WILL NOT BE NUMBERED: NUMBERS ONLY APPLY TO DRAWING.

STEP 4

UPON COMPLETION OF BENCH ASSEMBLY SQUARE ALL COMPONENTS THEN TIGHTEN ALL HARDWARE.

STEP 5:

MOUNT AND ANCHOR AS SPECIFIED.

ITEM	QTY	PART NO	DESCRIPTION
1	1	0-424-30-02/S-5	STL SEAT SUPPORT FOR 3 SEATS, FREE STD
2	3	0-425-00-01	STL BKLS SEAT (20")
3	4	0-425-00-02	STL ARMREST
4	12	1-11-019	3/8" X 1 1/4" SS CGE BOLT
5	12	1-20-019	3/8" SS THIN NYLON LOCKNUT
6	12	1-22-024	3/8" SS FLAT WASHER



SCALE : NONE DATE DRAWN : 8/12/11	TITLE :	BENCH ASSEMBLY	
DRAWN BY : JSB	REV.	DRAWING	SHEET
DATE REV. :	٨	$\begin{bmatrix} NUMBER & 425-34/S-5 & \end{bmatrix}$	
REV. BY :			2 OF 2